


Horizontal PDU to IP3, Overall & per port switching and monitoring & environmental monitoring.

DO NOT SCALE

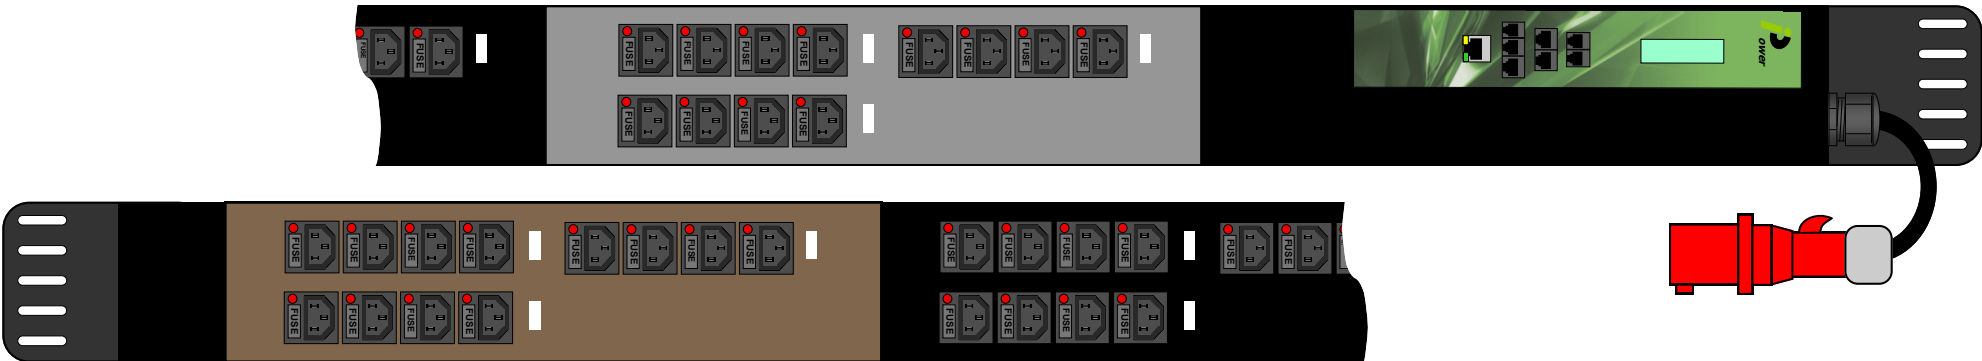

Body Dimensions: 140mmx 75mmx1785mm (o/a1969mm)
Material: Mild steel folded
Finish: Black powder coat with coloured phases
Fixing Method: Integral End Brackets
Protection: Fuse per outlet
Indicator: Power present neon per outlet
Earthing: M6 Earth stud to end
Rating: 32A @ 400V
Special Requirements: None

Input: 3mtr 5x6.0mm HO7 IEC 309 32A 5 pin Plug
Output: 36x C13Fuse &Neon 12 per phase
Fuse Rating: C13 @ 10Amp
Estimated weight: 8.kg
Standards: Manufactured in accordance with BS EN 60950-1
WEEE: Compliant
RoHS: Compliant
CE: Compliant
Max Op Temperature: -10° to +50°C



IP-522-IP3

© 2016 This drawing and the works depicted are the copyright of IPT Limited and may not be reproduced or amended except by written permission. No liability will be accepted for amendments made by other persons.

Rev:- 3	EMM
	131216